

Showrya Honda C.Camp, Kurnool

Technology:



More on Technology:




eSP Technology
Reduced friction and improved performance and fuel efficiency.



PGM-FI Fuel Injection
Advanced sensor-based system ensuring constant optimum fuel flow to the engine based on the riding style, allowing for higher efficiency and lesser emissions.



100 cc BS-VI OBD2B Compliant Engine
Honda's 100 cc BS VI OBD2B-compliant engine ensures superb performance, unmatched reliability, and best-in-class mileage. It offers optimum riding experience while following OBD2B norms.

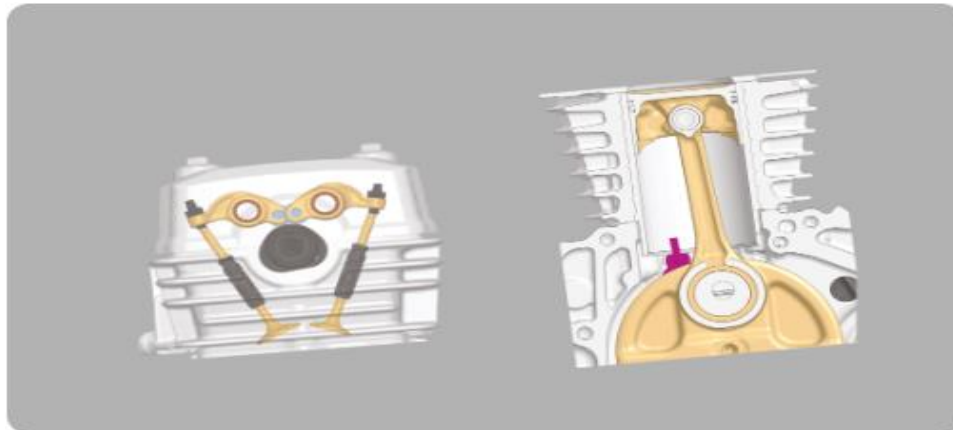

Reduced Friction
Reduced friction and constant ideal engine temperature by piston cooling jet, offset cylinder, and rocker roller arm working together.

Design:



Appealing Front Cowl

Elegant aerodynamic front cowl and powerful head lamp give the bike a pleasing look.



Stylish Alloy Wheels

All-black alloy wheels accentuate the overall look of the bike.



Stylish Graphics

All new enriched and splendid graphic design that compliments the overall look of the bike.



Simplistic Instrument Panel

A simple and minimalist instrument console complements its mature character.

Comfort:



Easy Ground Touch and Optimum Seat Height

Riders can easily be flat-footed with optimum seat height that enhances comfort.



Longer and Comfortable Seat

Long journeys made easy with longer and more comfortable seating with awesome ergonomics.



Small Turning Radius

Perfect for tight corners and narrow roads.



Superb Suspension Dynamics

Perfect suspension setup makes riding on every road a breeze.

Safety:



Durable Diamond Frame

Suited for different road conditions.



Side Stand Engine Inhibitor

No ignition when the stand is engaged.



Strong Grab Rail

Enhances elegance and convenience.

Technical Specifications

Body Dimensions	Length	1995 mm
	Width	754 mm
	Height	1050 mm
	Wheelbase	1245 mm
	Ground Clearance	168 mm
	Kerb Weight	99 kg
	Seat Length	677 mm
	Seat Height	786 mm
Engine	Fuel Tank Capacity	9 L
	Type	4-Stroke SI Engine
	Displacement	98.98 cc
	Max Engine Output	5.43 kW @ 7500 rpm
	Max Net Torque	8.05 Nm @ 5000 rpm
	Fuel System	PGM-FI
	Bore x Stroke	47.0 X 57.049 mm
	Compression Ratio	10.0:1
Transmission	Starting Method	Self/Kick
	Clutch Type	Multiplate Wet Clutch
Tyres & Brakes	No. of Gears	4
	Tyre Size & Type (Front)	2.75 - 17 41P, Tube Type
	Tyre Size & Type (Rear)	3.00 - 17 50P, Tube Type
	Brake Type & Size (Front)	Drum - 130 mm
Frame Suspension	Brake Type & Size (Rear)	Drum - 110 mm
	Frame Type	Diamond Type
	Front Suspension	Telescopic
Electricals	Rear Suspension	Twin
	Battery	12 V, 3.0 Ah
	Headlamp	Bulb Type



- ❖ The technical specifications and design of the vehicle may vary according to the requirements and conditions without any notice
- ❖ Shine meets Bharat Stage VI norms
- ❖ Product shown in the picture may vary from actual product available in the market
- ❖ Accessories shown in the picture are not part of standard equipment.
- ❖ Mileage has increased by 14% for Shine as compared to CB Shine BS IV.
- ❖ Ground Clearance has increased by 5 mm and Wheelbase has been increased by 19 mm for Shine as compared to CB Shine BS IV

Honda Motorcycle and Scooter India Pvt. Ltd.,

Registered Office: Commercial Complex II, Sector - 49-50, Golf Course Extension Road, Gurugram - 122018 (Haryana)

Visit us at: www.honda2wheelersindia.com

Customer Care: customercare@honda2wheelersindia.com

Kurnool Showroom: Showrya Honda, Plot No.73, 77 & 79, Survey No. 713/A2, C Camp, Kurnool-518002, Ph: 9154215002, Website: showryahonda.in